

SKYSTAR

PROFESSIONAL SHOW LIGHTING

400W LED FOLLOW SPOT

FS - 400M

USER MANUAL

SKYSTAR


GUANGZHOU LIGHTSTAR LIGHT CO.,LTD

[Http://www.lightskystar.com](http://www.lightskystar.com)



Manual MODE:

Control functions in the control panel,

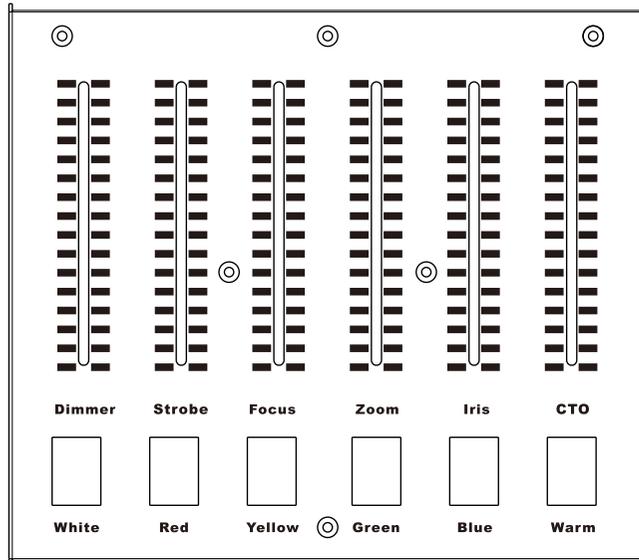


Master-slave MODE:

First open the power is master, other is slave



DMX512 MODE:

After accessing DMX signal, it will be automatically converted into DMX mode

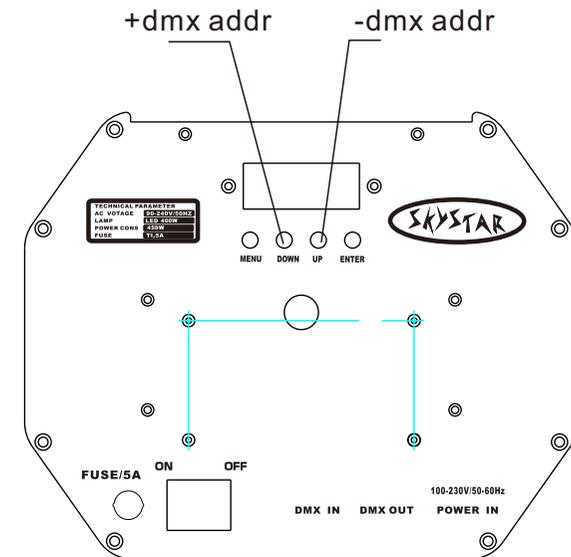

FS-400M DMX Channel	
CH1 Dimmer	
CH2 Strobe	
CH3 Color	
CH4 Focus	
Ch5 zoom	
Ch6 Iris	
Ch7 CTO	4000K-7500K

◎ TECHNICAL PARAMETER:

Power: AC 90-240V 50HZ/60HZ

Light source: 400W LED

Power consumption: 450W

Beam angle: 3°-12° adjustable

zoom: 6-15° adjustable

Cast distance 60-70 meters

Color: 5colors+open

CTO 3200K-7500K stepless adjustable

Strobe 1/20sec -2 SEC adjustable

Dimmer: 0-100% adjustable

High brightness: 20M/3600LUX

Control mode: electronic push

button/DMX512 control

Cooling system: convection cooling-fan,
optimize internal air duct way, heat elimination rapidly

IP grade: Ip20

According to various kinds of safety standards, Light weight,
easily useAs well as the stage. multi-functional studio and
disco, wedding ceremony.

FIXTURE DIMENSION: L890×W290×H290(mm)

PACKING DIMENSION: L930×W330×H340(mm)

Net weight: 15kgs

Gross weight: 17kgs